


WICK[®] 100-4H



ULTRA LIGHTWEIGHT, HIGH PERFORMANCE FIRE PUMP

- Powered by a reliable 4-stroke, 50 cc Honda engine, the WICK[®] 100-4H has the best performance of all pumps in its' class
- Integral fuel tank
- Coupled to a bolt-on detachable, single-stage foamcompatible pump
- Unique clutch feature for easy starting and water conservation
- Single stage, detachable pump end for easy maintenance
- Meets the emission standards of US EPA/CARB regulations
- Optional transportable back pack

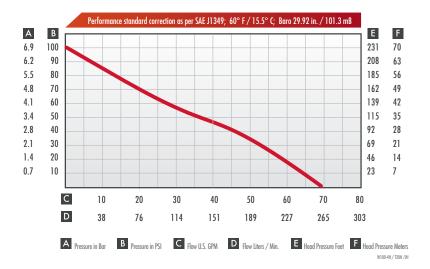

WEIGHT & DIMENSIONS		
Length Width Height Weight Suction	14.0" 11.0" 16.0" 20.2 lbs 1.5" NPSH	36 cm 28 cm 41 cm 9.16 kg 38 mm
Discharge ENGINE	1.5" NPSH	38 mm
Honda GHX50 Clutch Drive	4 stroke; 50 cc; 2	.5* gros Hp @ 7000 RPM
Fuel Tank Capacity	0.81 Qt. US	0.77 L

 * Net power output is 2.1 Hp @ 7000 RPM. Mass production engines may vary from this value.

.26 Qt US

Oil Capacity

5838 Cypihot Saint Laurent, QC Canada, H4S 1Y5 Phone 514.335.4337 Phone 877.937.9660 Fax 514.335.9633 mercedestextiles.com sales@mercedestextiles.com

INNOVATION DELIVERED.

0.25 L

WICK[®] 100-4H

BID SPECIFICATION

- The portable fire pump must have a Honda model GX50, 4-stroke, 50cc engine
- The pump must come standard with a centrifugal clutch
- The pump must have a detachable (bolt-on) foam-compatible single-stage pump end
- The pump must have an integral fuel tank that provides approximately 40 minutes run time
- The pump must be equipped with an electronic ignition
- The pump must not weigh more than 20.2 lbs / 9.16 kg
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page
- The pump must meet the emission standards of US EPA/CARB regulations
- The pump must be available with a transportable back pack



WICK® 100-4H

Part#	Description
71WICK100-4HA	WICK [®] 100-4H Fire Pump

	OPTIONAL			
	Part#	Description		
Α	71W104-HPACK	Back Board with padded carrying straps		
A1	70FLHPPQC	Hand Primer QC		
A2	70FLHPPPS	Hand Primer NPSH		
A2	70FLHPPNH	Hand Primer NH		
B	70FL15TPPS	Thread protector 1 ½" / 38mm		
B	6124NM24PF	Adaptor 1 ½" / 38mm NH Male x 1 ½" / 38mm NPSH Female		
C	70FL15DLPS10	Draftlite HP suction hose 1 $\frac{1}{2}$ "/38mm x 10'/3M c/w NPSH *		
D	70FLFV15PF	Foot Valve / Strainer (Alum) 1 ½"/38mm Female NPSH *		

* See website for complete listing of accessory and related products

5838 Cypihot Saint Laurent, QC Canada, H4S 1Y5 Phone 514.335.4337 Phone 877.937.9660 Fax 514.335.9633 mercedestextiles.com sales@mercedestextiles.com © 2014 Mercedes Textiles Limited IO4H /JH ® Represents registered trademarks of Mercedes Textiles Limited, unless otherwise noted M Represents trademarks of Mercedes Textiles Limited, unless otherwise noted

INNOVATION DELIVERED.